


One Source

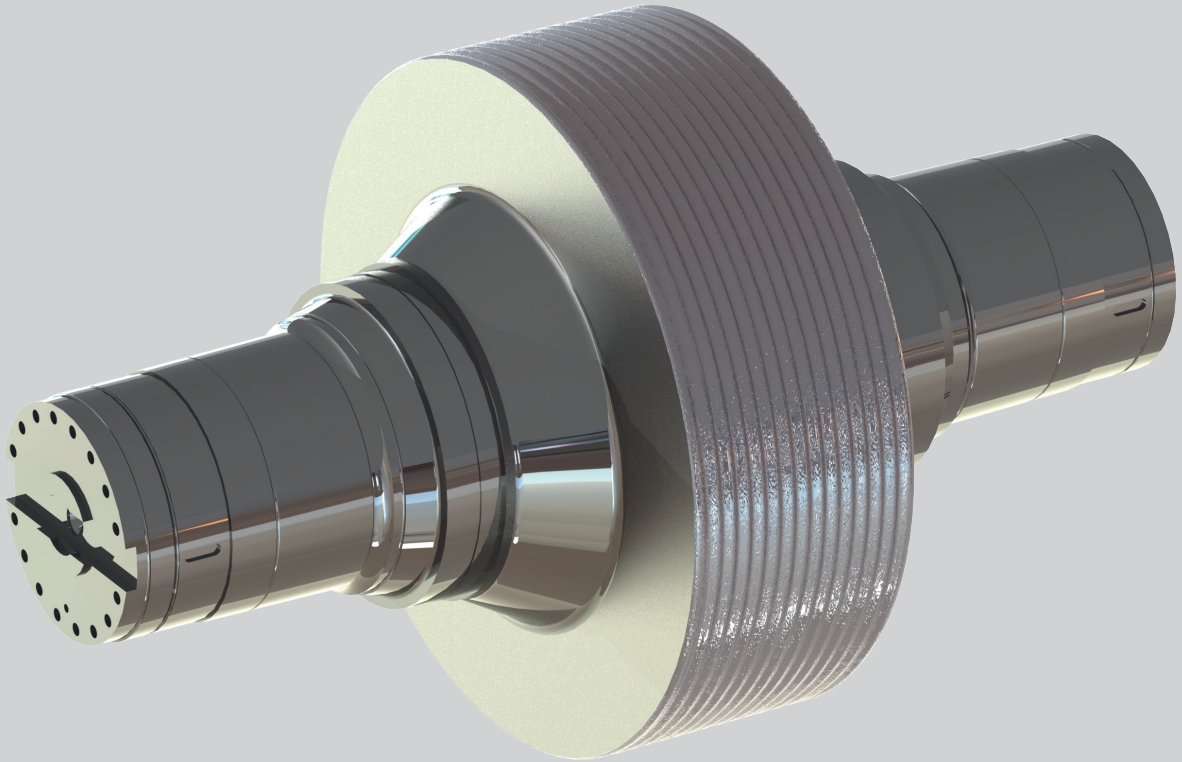

TRIBOMAX™ wear surface

TRIBOMAX is a unique wear protection surface for hydraulic roller press installations. TRIBOMAX wear protection solution provides high performance and longer roller lifetime. This is achieved through a combination of high resistance to wear and high resistance to surface overloading.


TRIBOMAX is ideal for grinding of clinker, slag and raw mix. TRIBOMAX rollers can be supplied either as solid rollers or as shrink-fitted solutions.

For more information, please visit www.flsmidth.com/tribomax

FLSmidth Private Limited • FLSmidth House • 34, Egatoor, Kelambakkam (Rajiv Gandhi Salai, Chennai)
Tamil Nadu – 603 103 • Tel: +91-44-4748 1000 • Fax: +91-44-2747 0301 • E-mail: indiainfo@flsmidth.com



One Source

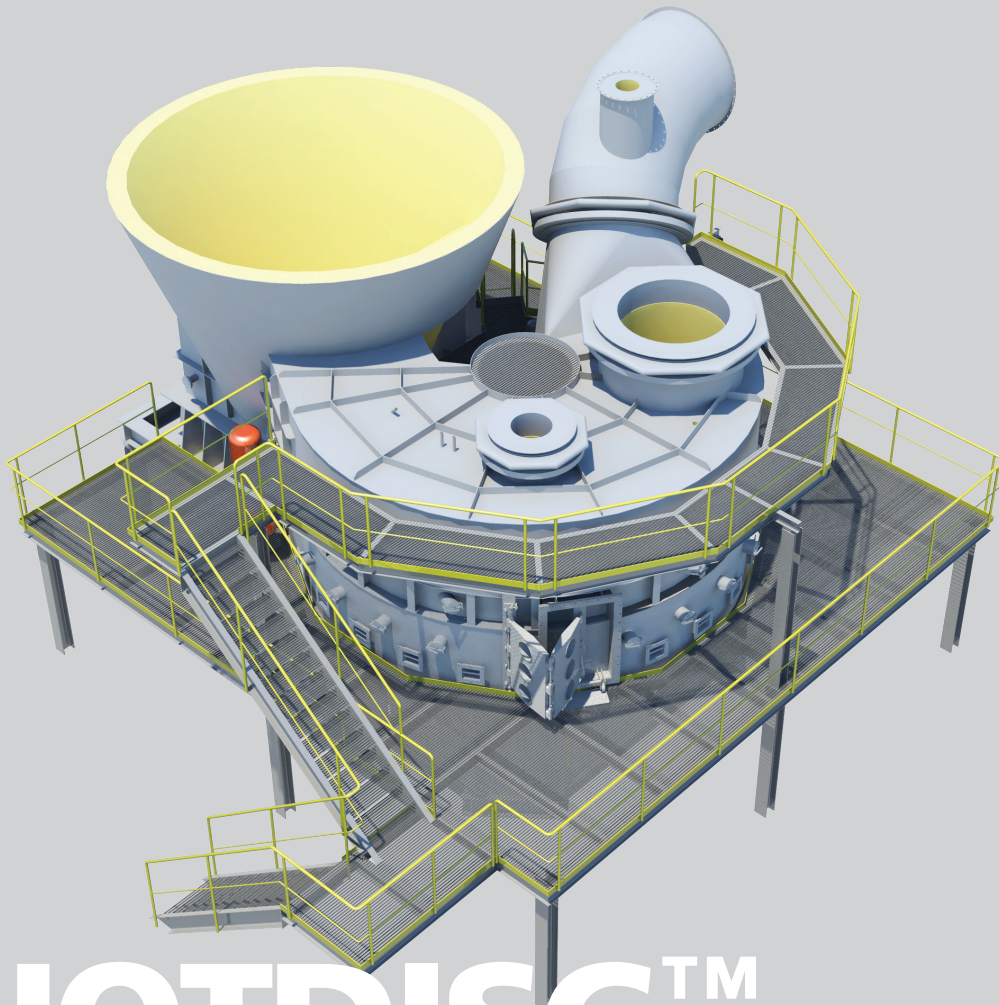

HOTDISC™ combustion device

Flexible option for waste co-processing • Low calorific value (down to 4,6MJ/kg) and up to 50 % moisture content • Particle sizes up to 1.2m with typical size ranges in the area of 100 to 300 mm • Up to 240.000 tons of waste per year • Negligible electrical energy consumption • Reduced waste to fuel preparation costs and less land fill • Reduced costs on cement process • Outlet for main burner off-spec materials.

For more information, please visit www.flsmidth.com

FLSmidth Private Limited • FLSmidth House • 34, Egatoor, Kelambakkam (Rajiv Gandhi Salai, Chennai)
Tamil Nadu – 603 103 • Tel: +91-44-4748 1000 • Fax: +91-44-2747 0301 • E-mail: indiainfo@flsmidth.com

FLSMIDTH